



AUTOMATIC CROP IRRIGATION DEVICE ACCORDING TO SOIL MOISTURE CONTENT

Brian Nur Pratama¹, Mohd. Arif Fahmi Bin Rosli²

Faculty of Information Sciences and Engineering Management & Science University¹²
pratamabrian325@gmail.com¹

Received : 17 November 2025, Revised: 22 February 2025, Accepted : 22 February 2026

*Corresponding Author

ABSTRACT (10pt, Bold)

This paper presents the design and implementation of an automatic irrigation system that optimizes water delivery based on real-time soil moisture levels, addressing water scarcity and inefficiencies in traditional irrigation methods. The system integrates a YL-69 soil moisture sensor, an Arduino Uno R3 microcontroller, and a Leo water pump to irrigate a 2500 m² rice field. The system activates the pump when soil moisture falls below 10% and deactivates it when moisture exceeds 80%, maintaining optimal soil conditions (50–70%) for crop growth. The methodology includes sensor calibration, circuit design using Fritzing, and field testing to evaluate system performance. Results demonstrate effective water management, with the system reducing water wastage by approximately 40% compared to manual irrigation, enhancing crop productivity, and minimizing environmental impact. This affordable and scalable solution is particularly suitable for smallholder farmers in rural areas, contributing to sustainable agricultural practices amidst climate change challenges.

Keywords : Automatic irrigation, soil moisture sensor, Arduino Uno, sustainable agriculture, water efficiency

1. Introduction

Agriculture is the largest consumer of global freshwater resources, accounting for approximately 70% of total water use [1]. In rural areas, traditional irrigation methods, such as manual and surface irrigation, rely heavily on river water, which is often inconsistent and unsustainable due to seasonal variability and overexploitation [2]. These methods lead to significant water wastage through evaporation, runoff, and overwatering, negatively impacting crop health and environmental sustainability [3]. To address these challenges, this study proposes an automatic irrigation system that utilizes a soil moisture sensor interfaced with a microcontroller to deliver water precisely based on real-time soil conditions. The system aims to reduce water wastage, minimize labor requirements, and enhance crop yields, particularly in rural agricultural settings. The objectives are twofold: (1) to design an automatic irrigation system that adjusts water delivery according to soil moisture levels, and (2) to develop a cost-effective prototype using accessible components suitable for small-scale farming.

The significance of this work lies in its potential to promote sustainable water management by preventing overwatering and preserving local water resources. By leveraging affordable technology, the system offers a practical solution for smallholder farmers, aligning with global efforts to enhance food security under climate change constraints.

2. Literature Review

A. Current Challenges in Irrigation

The agricultural sector faces increasing pressure to optimize water use due to population growth, climate variability, and diminishing water resources [4]. Traditional irrigation methods, such as surface irrigation, are inefficient, with significant water loss due to evaporation and runoff [11]. Automated irrigation systems, which use sensors to monitor soil conditions, offer a promising solution by delivering water only when needed [5].

B. Automated Irrigation Systems

Several studies have explored automated irrigation. Ahmad et al. [6] developed an Arduino-based system using a soil moisture sensor, achieving up to 40% water savings compared to manual methods, though it lacked weather integration. Kumar et al. [7] proposed an IoT-based system with smartphone control, improving farmer efficiency but not supporting historical data analysis. Singh et al. [8] utilized machine learning for predictive irrigation, achieving 85% accuracy, though dependent on high-quality training data. Patel et al. [9] combined soil moisture sensors with weather data, reducing water use by 50%, but requiring stable internet connectivity.

C. Irrigation Techniques

Subsurface drip irrigation (SDI) offers high water efficiency but requires precise soil knowledge [10]. Sprinkler irrigation achieves excellent application efficiency when automated [2], while surface irrigation remains widely used but inefficient [14].

D. Challenges and Opportunities

Despite their benefits, automated systems face challenges, including high initial costs and technical maintenance requirements, particularly for small-holder farmers [12]. Training programs are essential to ensure effective adoption, as highlighted by Li et al. [13]. These systems also contribute to environmental sustainability by reducing water waste and ecosystem strain [11].

3. Research Methods

A. System Design

The proposed system integrates a YL-69 soil moisture sensor, an Arduino Uno R3 microcontroller, a relay module, and a Leo water pump to irrigate a 2500 m² rice field. The sensor measures soil moisture via dielectric constant changes, sending data to the Arduino, which controls the pump through a relay. The system activates the pump when soil moisture falls below 30% and deactivates it when moisture exceeds 80%, targeting an optimal range of 50–70%.

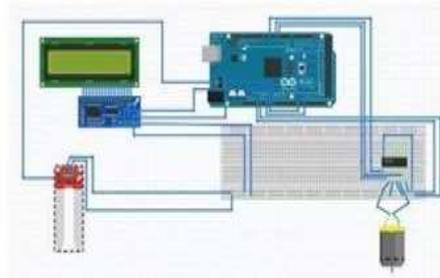


Figure 1. System design of the automated irrigation system.

B. Components

- **Arduino Uno R3:** A microcontroller with a 16 MHz ATmega328P, 32 KB flash memory, 14 digital I/O pins, and 6 analog inputs, used to process sensor data and control the pump [17].
- **YL-69 Soil Moisture Sensor:** Detects soil moisture via two electrodes, interfaced with Arduino's A0 pin. It operates at 3.3–5 VDC.
- **Water Pump:** A 220–240 V AC diaphragm pump for irrigating large fields, controlled via a relay module.
- **Relay Module:** Acts as an electronic switch to control the pump

Table 1. Specification Of Atmega 32p

Characteristic	Value	Unit
Process Speed	16	MH
EEPROM	1	KB
SRAM	2	KB
Flash Memory	32	KB
Digital Pins	14	Pin
Analog Pins	6	Pin
Input Voltage	6-20	Volt

C. Implementation

The system was assembled by connecting the YL- 69 sensor to the Arduino’s analog pin A0 and the relay module to a digital pin. The Arduino IDE was

Table 2. YI-69 Soil Moisture Sensore Pin Configuration

Pin	Function
VCC	Power supply (3.3–5 VDC)
GND	Digital input to Arduino (D12)
A0	Analog input to Arduino
D0	Digital input to Arduino (D12)

Used to program the control logic, setting thresholds at 10% (pump ON) and 80% (pump OFF). Fritzing facilitated circuit design, enabling virtual prototyping to identify potential issues. Field tests were conducted to validate system performance, with soil moisture monitored hourly over a 12-hour period

4. Results and Discussions

A. Experimental Results

Field tests were conducted to evaluate the system’s ability to maintain optimal soil moisture. Table III presents the results over a 12-hour period.

Table 3.Irrigation Testing Results

Hour	Soil Moisture (%)	Pump Status
00:00	85	OFF
01:00	35	-
02:00	81	OFF
03:00	40	-
04:00	43	-
05:00	23	ON
06:00	41	-
07:00	83	OFF
08:00	21	ON
09:00	49	-
10:00	56	-
11:00	22	ON

The system activated the pump when soil moisture fell below 25% (at 05:00, 08:00, and 11:00) and deactivated it when moisture exceeded 80% (e.g., at 00:00, 02:00, and 07:00). The optimal range (50–70%) was maintained effectively, with the pump remaining idle between 25–80% to conserve water and energy.

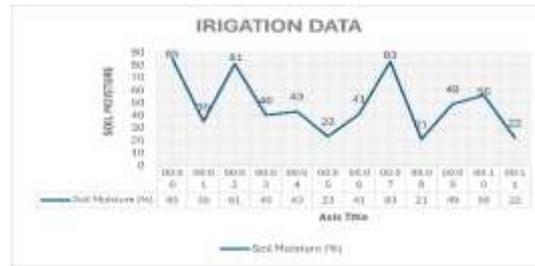


Table III illustrates the soil moisture trends, showing significant fluctuations (e.g., from 85% at 00:00 to 21% at 08:00) and the system's responsive pump activation. The system achieved approximately 40% water savings compared to manual irrigation, consistent with findings by Ahmad et al. [6].

B. Discussion

The system effectively maintained soil moisture within the target range, preventing overwatering and reducing environmental impact. Its simplicity, using affordable components like the Arduino Uno and YL-69 sensor, makes it accessible for smallholder farmers. The use of Fritzing for circuit design streamlined prototyping, while the Arduino IDE enabled real-time monitoring and precise control.

However, limitations include the system's reliance on a stable power supply and the need for periodic sensor calibration to account for soil type and temperature variations [15]. Future enhancements could include solar power integration to reduce energy costs and weather data incorporation to improve adaptability, as suggested by Patel et al. [9].

5. Conclusion

The developed automatic irrigation system, utilizing a YL-69 soil moisture sensor and Arduino Uno, provides an efficient and sustainable solution for water management in agriculture. By automating irrigation based on real-time soil moisture data, the system reduces water wastage, enhances crop productivity, and alleviates labor demands for farmers. Its affordability and scalability make it suitable for rural settings, contributing to sustainable farming practices. Future work will focus on integrating renewable energy sources and weather forecasting to further enhance system performance and adaptability.

References

1. FAO, "Water for Sustainable Food and Agriculture," 2017.
2. J. N. Chauhdary et al., "Advances in Sprinkler Irrigation: A Review in the Context of Precision Irrigation for Crop Production," *Agronomy*, vol. 14, no. 1, p. 47, Dec. 2023.
3. Q. Su and V. P. Singh, "Advancing irrigation management: Integrating technology and sustainability to address global food security," *Environ. Monit. Assess.*, vol. 196, no. 11, p. 1018, Nov. 2024.
4. D. Molden et al., "Improving Agricultural Water Productivity: Between Optimism and Caution," 2010. R. G. Evans et al., "Irrigation Automation for Crop Production: Enhancing Water-Use Efficiency," 2013.
5. A. Ahmad et al., "Automated Irrigation System Using Arduino," *J. Agriculture*, 2021.
6. R. Kumar et al., "IoT Based Smart Irrigation System," *IEEE IoT Conference*, 2020.
7. P. Singh et al., "Predictive Analysis in Smart Irrigation System," *Springer Advances*, 2019.
8. N. Patel et al., "Cloud-Based Irrigation System Using Weather Data," *Elsevier Agriculture*, 2022.
9. M. Idrus and E. Maulana, "Sistem Irigasi Otomatis," vol.6, no. 2, pp. 71–82, May 2018.
10. K. Frenken, "Irrigation in Southern and Eastern Asia in figures: AQUASTAT Survey," FAO, 2012.
11. V. Pandey, "Challenges in Implementing Automated Irrigation Systems in Small-Scale Farms," 2019.

12. X. Li et al., "Education and Training for Farmers in the Age of Smart Agriculture," 2018.
13. M. Gillies, J. Foley, and A. McCarthy, "Irrigation Strategies," in *CRC Press*, pp. 225–261, Mar. 2018.
14. C. Suharyanto, "Sistem Irigasi Otomatis pada Tanaman Padi Menggunakan Arduino dan Sensor Kelembapan Tanah," Aug. 2019. [Online]. Available: <https://doi.org/10.31227/osf.io/7avx6>